

13831 S.W. 59 Street. No 202. Miami, Fl. 33183 Tel : (305) 382-3432. Fax: (305) 382-6274. email : rangy@rangy.com

EQUIPO CONTRA INCENDIOS

DETECTORES DE HUMO CON ALARMA

SMOKE ALARM, DUAL-CHAMBER IONIZATION

Affordably priced, with advanced, stainless steel sensor. Flashing LED indicates proper power supply; low-battery signal beeps for 30 days.

Precio de Lista: US\$ 10.80



914E IONIZATION SMOKE DETECTOR

The 914E ionization Smoke Detector is U.L. Listed, includes a test button, power on LED and an 85db alarm horn. Body measures 3 7/8" with a 4 7/8" mounting plate. Comes with a 3 year limited warranty and includes the battery.

Precio de Lista: US\$ 9.00



SMOKE ALARM, SINGLE/MULTIPLE 24-STATION IONIZATION, 120V AC

Use singly or interconnect up to 24 stations. Tamperproof locking pin. LED power indicator. Mount on wall or ceiling. 5-year limited warranty. UL-listed.

Precio de Lista: US\$21.60





Tel: (305) 382-3432. Fax: (305) 382-6274.

email: rangy@rangy.com

SMOKE ALARMS FOR HEARING-**IMPAIRED**

177 Candela Strobe with 60 - 70 Flashes per Minute and 85 dB Alarm Horn. Dual-ionization sensor samples air every 1.6 seconds. Comes with a bracket for mounting to octagonal junction box up to

4-in. 120V, 60Hz. Plug-in connector included.

Precio de Lista: US\$132.00




ALARMAS DE FUEGO

MANUAL PULL STATION

Alarm Manual Pull Station made of red die casting with steel back plate. Contains a 10 amp snap action switch and measures 4 3/4"H x 3 1/4"W x 7/8"D. Meets U.L., ULC, CSFM, and BAS requirements.

Precio de Lista: US\$16.40



CUBIERTAS PARA ALARMAS DE FUEGO

FIRE ALARM COVER WITH BREAKER BARS RECESS MOUNT COVER

5 5/16 " -square glass front and include chain and breaker bar. Surface mount has a round slot on top to accommodate conduit. Red baked enamel finish., with a removable top. 7 1/8' W x 7" H.

Precio de Lista US\$ 38.40

Catálogo Equipo Contra Incendios..doc/ MIM





email: rangy@rangy.com

PULL STATION COVERS WITH HORNS

Tough, high-density, rustproof impact-resistant plastic meets UL HB94 Burn Rating. Glass panel has silk-screened message on the inside. Cover stays open for inspection/maintenance. Breaker bars (included) can be installed on either side. Horn uses two L1154 watch-type batteries.

Precio de Lista: US\$63.60



LUCES DE EMERGENCIA

EMERGENCY LIGHTS, DUAL-LITE, SURFACE MOUNT, CIRCULAR, 1.5-HOUR LIGHT

Has 7.2-watt, 5-in. diameter light heads that are completely adjustable. Attractive off-white finish. 14-in. long base. Emergency-powered by a 4V, pure-lead, maintenance-free battery.

Precio de Lista: US\$ 66.00



EMERGENCY LIGHT (FIXED HEADS)

- <u>UL_LISTED-meets: UL 924, NFPA NFPA 101-1991 (current Life Safety Code); NEC.</u>
- Snap-together design allows for installation in three easy steps in less than three minutes.
- Features light-directing prismatic lenses capable of field adjustment.
- UV stabilized polycarbonate housing resists discoloration.
- Wall or ceiling mounted.
- Full 3 year warranty.
- Voltage: 120V/227V AC

Power Consumption: 10.8 Watts

Light will last a minimum of 90 minutes and up to four hours on

battery power.

(Note: Temperature may affect battery capacity.)

Precio de Lista: US\$ 47.95





Rangy Enterprise, Inc.

13831 S.W. 59 Street. No 202. Miami, Fl. 33183. Tel: (305) 382-3432. Fax: (305) 382-6274.

email: rangy@rangy.com

6 VOLT, 24 WATT EMERGENCY LIGHT W/ SWIVEL HEADS

Power Consumption: 24 Watts

Lithonia **Emergency Lighting Units** feature a snap together construction which allows for a three step installation in less than three minutes. Unique UV stabilized polycarbonate housing that resists discoloration.. All units feature a unique track and swivel design that permits full-range adjustment of lamp heads. All units have a three year warranty, dual voltage input of 120 or 277 VAC and can be mounted on the wall or ceiling.

Precio de Lista: US\$51.55

LUCES DE SALIDA

COMBINATION EXIT SIGN/EMERGENCY LIGHT

20-gauge steel cabinets have white chip resistant finish. Canopy included for ceiling, end, and surface mounting. Includes AC/DC lamps . Back-up battery keeps sign luminated until power is restored. Red and green letters. Two, 15-watt incandecents. Two lights are 6-watt, high-intensity lamps. $19"L \times 18" W \times 9" H$.

Precio de Lista: US\$165.60



EXIT SIGN/EMERGENCY LIGHT COMBINATION UNIT

Exit Sign/Emergency Light combination unit by Lithonia. Features a snap together design which allows for fast, easy installation in five minutes. The LED sign has a 25 year rated lamp life, low energy consumption and a five year warranty. Incandescent units have a three year warranty. All units come with replaceable directional knock-out arrows for choice of direction, unique UV stabilized polycarbonate housing that resists discoloration and dual voltage of 120 or 277 VAC.

- UV stabalized polycarbonate housing is impact and scratch resistant and corrosion proof
- Full 3 year warranty.
 - Unit can be universallly mounted on it end, top or back (canopy included).
 - State of the art electronics.
 - Easy 5 minute installation with snap together design. Factory assembled and prewired
- Includes replaceable arrow knockouts.

Precio de Lista: US\$123.60





Rangy Enterprise, Inc.

13831 S.W. 59 Street. No 202. Miami, Fl. 33183. Tel: (305) 382-3432. Fax: (305) 382-6274.

email: rangy@rangy.com

BIG BEAM SINGLE-FACED EXIT SIGN

Universal mount, 20-gauge steel housing incandescent exit sign. 120/277 volts AC, 24/30 Hz. 2" L x 12.25" W x 7.5" H

Precio de Lista: US\$24.00

BIG BEAM EXIT SIGN, 2 SIDED

Universal mount (ceiling, end, or wall), 20-gauge steel housing with a white powdercoat finish, and red letters make this the perfect incandescent exit sign. 120/277 volts AC, 24/30 Hz. 2" L x 12.25" W x 7.5" H

Precio de Lista: US\$ 30.00



SINGLE-FACE LED EXIT SIGNS



LEDs have a life exceeding 20 years, saving energy and maintenance costs. 120 volt, 1.7 watt standard. Red letters. 12.5" L x 8" W x 2.75" H

Precio de Lista: US\$90.00

Precio de Lista (w/ batterie back-up): US\$138.00

EXTINGUIDORES

KIDDE FYRNETICS PROLINE DRY CHEMICAL FIRE EXTINGUISHER

Tri-class dry chemical extinguishes flames fast and inhibits reflash. Fights all common classes of fire. Reliable pressure gauge allows for fast and easy pressure checks. 6-year warranty.

Capacity: 10 Lb. UL Rating: 4A-60B:C

Size: 5.12"L x 8.22"W 21.18"H

Precio de Lista: US\$64.00

Catálogo Equipo Contra Incendios..doc/ MIM



GABINETES PARA EXTINGUIDORES

RED MARK II CABINET W/ RED COVER

- Costs less than metal cabinet
- No glass to cut. No special tools required, no breaker bar to get lost or stolen
- Dent, rust and corrosion proof.
- Comes complete with brass lock and all labels.
- For indoor & outdoor use.
- MATERIALS Cabinet: ABS Cover: Crystal polystyrene
- Disponible en color rojo, y blanco

Precio de Lista: US\$20.00



FIRE EXTINGUISHER CABINETS FOR 10-LB. EXTINGUISHER, POLYSTYRENE, WHITE

Injection-molded from high-impact virgin polystyrene plastic that will not rust, dent, or fade. No glass to shatter or sharp corners. One-piece covers are polystyrene; a breakable plastic clip allows quick access to fire extinguisher.

Inner: 6 3/4" W x 20" H x 6 " D

Precio de Lista: US\$27.60



FIRE EXTINGUISHER CABINETS W/GLASS FRONTS FOR 10-LB. EXTINGUISHER, ABS PLASTIC, WHITE

Molded of high-impact white ABS plastic with full break-glass fronts. Cabinets are rust, sun, dent, and shatterproof. Can be recessed or surface mounted. Units have keyed lock and breaker bar with chain.

Inner: 6 3/4" W x 20" H x 6 " D

Precio de Lista: US\$35.00





13831 S.W. 59 Street. No 202. Miami, Fl. 33183 Tel : (305) 382-3432. Fax: (305) 382-6274.

email: rangy@rangy.com

FIRE EXTINGUISHER CABINET, STEEL W/PLEXIGLAS FRONT, 9.5-IN. X 25.75-IN.

For fire extinguisher model: X2Q-898241. Durable, 20-gauge galvanized steel housing and and .060 unscored Plexiglas front. Bright white fused finish resists rust and corrosion. Cylinder lock prevents theft. Four mounting holes in back. Includes breaker bar.

Precio de Lista: US\$30.00



ETIQUETAS Y SEÑALES

SEÑAL DE "EXTINGUIDOR DE FUEGO" VINIL AUTO-ADHESIVO

- Fade resistant.
- U.V. inks.
- Silk screened.
- Guaranteed.
- Red lettering within white arrow on red background.
- Disponible en tamaños: 4" x 18" (español e inglés)
- Tamaño: 4" x 12" (inglés)

Precio de Lista (español): US\$1.00

Precio de Lista (inglés 4" x 18"): US\$0.60 Precio de Lista (inglés 4" x 12"): US\$0.45



SEÑAL DE "NO FUMAR" VINIL AUTOADHESIVO

Medida: 8" x 10"


Precio de Lista: US\$0.85





13831 S.W. 59 Street. No 202. Miami, Fl. 3318 Tel : (305) 382-3432. Fax: (305) 382-6274. email : rangy@rangy.com

SEÑAL DE "SALIDA" Y "ALARMA DE FUEGO" VINIL AUTOADHESIVO



Precio de Lista: US\$ 0.85




Precio de Lista: US\$0.85

MANGUERAS Y ACCESORIOS

RIELES PARA MANGUERAS

Economy **Hose Reels** shipped assembled. Red baked enamel finish. Comes with a 14 gauge steel wall bracket that swings 180° (will accept 2" to 3" pipe clamps sold separately).

Precio de Lista(18"): US\$57.00 Precio de Lista(24"): US\$64.50



MANGUERAS

Rack and Reel Fire Hose is fully lined and FM Labeled. Has an acceptance test pressure of 500 PSI and a service test of 250 PSI. Each section comes already folded for ease of installation on pin racks. NOTE: This inexpensive lightweight hose is designed for use as emergency fire hose only! It should never be used for wash down or any other purpose. U.L. Labeled rack and reel fire hose is available for an additional fee.



Catálogo Equipo Contra Incendios..doc/ MIM



Rangy Enterprise, Inc.

13831 S.W. 59 Street. No 202. Miami, Fl. 33183. Tel: (305) 382-3432. Fax: (305) 382-6274. email: rangy@rangy.com

- FM Labeled
- Fully lined. 50' x 1 1/2"
- Pre-folded for 15 pin use
- · Lightweight, compact and easy to refold.
- Immune to deterioration from mildew and rot.
 Replaces unlined linen hose foot for foot
- UL Labelled rack and reel fire hose is available for an additional fee


Precio de Lista: US\$56.30

50' X 1 1/2" SJ FIRE HOSE (BRASS CPLD)

Single Jacket Fire Hose has a burst pressure of 750 PSI, an acceptance test pressure of 500 PSI, a service test of 250 PSI and is FM Labeled. Made of 100% polyester, rubber lined material for strength and flexibility. Recommended for industrial fire protection.

- FM Approved.
- 100% polyester jacket.
- Rubber lined.
- Lightweight, strong and flexible.
- Immune to deterioration from rot and mildew.
- Never needs drying.
- Designed for interior and exterior use; will fit most racks and reels.

Precio de Lista: US\$82.75

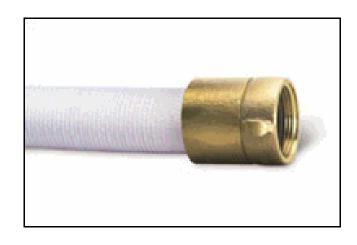

11/2" NST RH BRASS or ALUMINIUM COUPLING



Precio de Lista: US\$19.40



ASPERSORES DE AGUA (SPRINKLERS)

135 DEG. PENDENT or UPRIGHT BULB BRASS SPRINKLER HEAD

Listed and approved. Rugged frame, expanded wrench area. Tapered orifice prevents turbulence, provides unifrom distribution throughout all pressures. Unique deflector accounts for high degree of water atomization associated with Firematic sprinklers. Operates at full volume approximately one-tenth of a second after pressure is released.

The glycerin inside the bulb has a higher **I**: **A**: coefficient of thermal expansion than the glass bulb. Thus, when heated, it expands faster than the glass, so the glass shatters and the water pressure pushes the retainer out the way.

Height: 2" (not including threaded section) Exends approximately 2 17/32 " from ceiling surface including 1/2". **Coverage:** 10' x 10' area

Activation temperature:

135° F / 57° C () Tested down to -40° F by UL. the bulb does not suffer any ill effects from cold temperatures - the glycerin inside will not allow the bulb to freeze. If one activates in cold weather, it's most likely due to the high pressures that result from water freezing in a fixed volume (e.g., the pipe).





155 DEG. PENDENT BULB BRASS SPRINKLER HEAD

- UL listed and FM approved.
- Rugged frame, expanded wrench area.
- Tapered orifice prevents turbulence, provides unifrom distribution throughout all pressures.
- Unique deflector accounts for high degree of water atomization associated with Firematic sprinklers.
- Operates at full volume approximately one-tenth of a second after pressure is released
- **Temperature:** Activation: 155° F / 68° C (red bulb)

 Tested down to -40° F by UL. **Note:** the bulb does not suffer any ill effects from cold temperatures the glycerin inside will not allow the bulb to freeze. If one activates in cold weather, it's most likely due
 to the high pressures that result from water freezing in a fixed volume (e.g., the pipe).

Scope: Area: 10' x 10'

Miscellaneous: K Factor: 5.7

Pulle Liquide Chapting

Bulb Liquid: Glycerin

Precio de Lista: US\$5.00






13831 S.V. 59 Street. No 202. Miami, Fl. 33183 Tel: (305) 382-3432. Fax: (305) 382-6274. email: rangy@rangy.com . 492

PROTECTORES PARA ASPERSORES

ECONOMY SPRINKLER GUARD

- Economy model. Fits most 1/2 " heads.
- Made of red painted steel.

Precio de Lista: US\$1.65



HEAVY DUTY SPRINKLER GUARD

- Made of red painted steel.
- Also fits J series

Precio de Lista: US\$3.00



HERRAJE PARA PUERTAS DE SALIDA

Meet or exceed all legal and regulatory requirements. The 19 series comes in rim or surface vertical rod styles. Designed for doors 3' W x 7' H x 1½" thick. Wider and taller sizes are available for an upcharge. Can be configured for right- and left-hand-opening doors

Precio de Lista (Rim Exit Device, no trim): US\$156.00
Precio de Lista (Rim Exit Device, fire rated):: US\$192.00

